




Downhole $\frac{3}{4}$ " Memory Pressure Gauge (HT-750)

The HT-750 is a Versatile, Durable and Accurate Memory Pressure/Temperature Gauge. This versatile gauge can be used on Slickline, Wireline and Coil Tubing. It's small diameter, short length and high temperature rating (**350°F**) make this unique tool ideal for almost any situation.

Benefits

- ◆ High Capacity Flash Memory
- ◆ High Temperature Rating
- ◆ Ability to stay in the well for extended periods of time
- ◆ Custom program up to 14 time periods
- ◆ Tool performs internal tests and delivers visual signal to confirm operation
- ◆ Multiple-run data storage capability

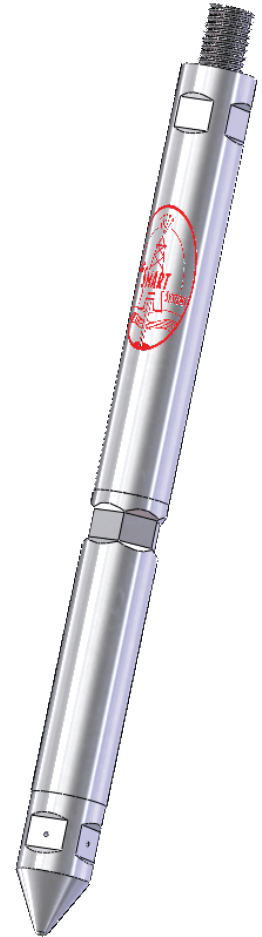

Length	8.5 in. (21.6 cm)
Weight	< 1 lb. (.45 Kgs)
Diameter	3/4 in. (19 mm)
Housing Material	Inconel 718

Memory Capacity	500,000 data sets (Time, Press, Temp.)
Sampling Intervals	1 sec to 1 hr
Pressure Ranges	1,500 psi (10,342 kPa) 3,000 psi (20,684 kPa) 5,000 psi (34,474 kPa) 10,000 psi (68,000 kPa) 15,000 psi (103,421 kPa)
Operating Temperature	32°F to 356°F (0°C to 180°C)
Resolution	Pressure - 0.03 psi Temperature - 0.03°F
Accuracy	Pressure ± 0.05% Full Scale Temperature ± 2°F
Power	3.6V (1- 'AA' Cell Lithium)